

UTILITY PATENT APPLICATION TRANSMITTAL

Submit an original and a duplicate for fee processing
(Only for new nonprovisional applications under 37 CFR 1.53(b))

ADDRESS TO:

Assistant Commissioner for Patents
Box Patent Application
Washington, D.C. 20231

Attorney Docket No. 1001/028C
First Named Inventor HUNNICUTT ET AL.
Express Mail No. EL150816925US
Total Pages 41

APPLICATION ELEMENTS

1. ☒ Transmittal Form with Fee
2. ☒ Specification (including claims and abstract) [Total Pages 26]
3. ☒ Formal Drawings [Total Sheets 4]
4. ☒ Combined Declaration and Power of Attorney [Total Pages 1]
 - a. ☐ Newly executed
 - b. ☒ Copy from prior application
[Note Box 5 below]
 - i. ☐ Deletion of Inventor(s) Signed statement attached deleting inventor(s) named in the prior application
5. ☒ Incorporation by Reference: The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.
6. ☐ Microfiche Computer Program
7. ☐ Nucleotide and/or Amino Acid Sequence Submission
 - a. ☐ Computer Readable Copy
 - b. ☐ Paper Copy
 - c. ☐ Statement verifying above copies

ACCOMPANYING APPLICATION PARTS

8. ☐ Assignment Papers
9. ☒ Associate Power of Attorney
10. ☐ English Translation Document (if applicable)
11. ☒ Information Disclosure Statement (IDS)
 - ☒ PTO-1449 Form
 - ☐ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Return Receipt Postcard (Should be specifically itemized)
14. ☐ Small Entity Statement(s)
 - ☐ Enclosed
 - ☐ Statement filed in prior application; status still proper and desired
15. ☐ Certified Copy of Priority Document(s)
16. ☐ Other:

17. If a **CONTINUING APPLICATION**, check appropriate box and supply the requisite information:
☒ Continuation of prior application Serial No. 08/689,838.

APPLICATION FEES

BASIC FEE				\$760.00
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE	
Total Claims	28 -20=	8	x \$18.00	\$144.00
Independent Claims	2 -3=	0	x \$78.00	\$0.00
<input type="checkbox"/> Multiple Dependent Claims(s) if applicable			+\$260.00	\$-0-
Total of above calculations =				\$904.00
Reduction by 50% for filing by small entity =				\$(-0-)
<input type="checkbox"/> Assignment fee if applicable			+\$40.00	\$-0-
TOTAL =				\$904

UTILITY PATENT APPLICATION TRANSMITTAL

Attorney Docket No. 1001/028C

18. ☐ Please charge my Deposit Account No. 04-1697 in the amount of \$.
19. ☒ A check in the amount of \$904.00 is enclosed.
20. The Commissioner is hereby authorized to credit overpayments or charge any additional fees of the following types to Deposit Account No. 04-1697:
- a. ☒ Fees required under 37 CFR 1.16.
 - b. ☒ Fees required under 37 CFR 1.17.
 - c. ☐ Fees required under 37 CFR 1.18.
21. ☒ The Commissioner is hereby generally authorized under 37 CFR 1.136(a)(3) to treat any future reply in this or any related application filed pursuant to 37 CFR 1.53 requiring an extension of time as incorporating a request therefor, and the Commissioner is hereby specifically authorized to charge Deposit Account No. 04-1697 for any fee that may be due in connection with such a request for an extension of time.


22. CORRESPONDENCE ADDRESS

Kirk D. Williams, Registration No. 42,229
Duft, Graziano & Forest, P.C.
1790 30th Street, Suite 140
Boulder, Colorado 80301-1018
Telephone: 303-449-9497
Facsimile: 303-449-0814

Name

Kirk D. Williams

Signature



Date


January 4, 1999

Certificate of Mailing Under 37 C.F.R. 1.10

I hereby certify that this Utility Patent Application Transmittal and all accompanying documents are being deposited with the United States Postal Service "Express Mail Post Office To Addressee" Service under 37 C.F.R. 1.10 on the date indicated below and is addressed to: Assistant Commissioner for Patents, Box Patent Application, Washington, D.C. 20231.

Kirk D. Williams

Name of Person Signing



Signature

January 4, 1999

Date

Table 1

Year	Population	GDP	Urbanization	Life expectancy	Fertility rate	Mortality rate	Health expenditure	Infant mortality	Maternal mortality
1970	1.8 billion	\$1.6 trillion	29%	52 years	6.5 children/woman	15 per 1,000 live births	\$1.6 billion	100 per 1,000 live births	1,000 per 100,000 live births
1980	2.2 billion	\$2.2 trillion	35%	55 years	5.5 children/woman	12 per 1,000 live births	\$2.2 billion	80 per 1,000 live births	800 per 100,000 live births
1990	2.6 billion	\$3.0 trillion	42%	58 years	4.5 children/woman	9 per 1,000 live births	\$3.0 billion	60 per 1,000 live births	600 per 100,000 live births
2000	3.0 billion	\$4.0 trillion	50%	60 years	3.5 children/woman	7 per 1,000 live births	\$4.0 billion	40 per 1,000 live births	400 per 100,000 live births
2010	3.4 billion	\$5.0 trillion	55%	62 years	2.5 children/woman	5 per 1,000 live births	\$5.0 billion	25 per 1,000 live births	250 per 100,000 live births
2020	3.8 billion	\$6.0 trillion	60%	65 years	1.5 children/woman	3 per 1,000 live births	\$6.0 billion	15 per 1,000 live births	150 per 100,000 live births

RELATED CASES

This is a continuation of Application
No. 08/689,838, filed August 14, 1996, which is hereby
incorporated by reference.

Field of the Invention

The invention relates to the control of access by users to resources available on a server. In particular, the invention relates to a caching mechanism for more efficiently performing an access check in response to a current resource request that is similar to a previous request.

Statement of the Problem

In a computer network it is often desirable to control access by users to resources available on the network. A user requesting a resource on a server may be local to the server or may be communicating over a network with the server. A network includes local-area networks, intranet networks, and the internet as well as any other networked computing environment. Requesting users might log on to the server with a unique user name and password or they might be 'anonymous' to the server.

Anonymous users typically have limited access to the server's resources. The occurrence of anonymous users is particularly prevalent in the case of networks such as the internet where any public user with internet access can access a given server.

Access control lists are used to define the extent to which different users will be allowed access to

different resources on a server. An access control list contains information which allows the operating system of a server to determine if a particular user has been granted access rights for a particular resource requested by the user. Each restricted resource has associated with it an access control list which lists the users granted access to the resource. Depending on the level of access control implemented on a given server, access control lists might be associated with disks, with files, or with other storage volumes. In an operating system where access control lists are associated with disks, an access control list for a given disk defines the access restrictions for all the resources or files stored on that disk. In an operating system where access control lists are associated with files, access by users is separately controlled for each file.

The flexibility and system performance offered by file-level access control is significant. However, the number of access checks performed by such a system is increased dramatically as compared to a system where access control is maintained only at the disk level. As with all operations of an operating system, performing an access check in response to a user request for a resource requires processing time of the central processing unit ("CPU time"). When a server is handling a large number of file requests a significant amount of CPU time can be consumed by performing the necessary access checks. In a system employing file-level access control lists, the access control list is part of each individual file-object. When a request for a given file-object is received, the operating system identifies the requesting user, opens the requested file-object, reads the access control list to determine if the user has the necessary

access rights, and then delivers the file-object to the requesting user if the user has the necessary access privileges. Therefore it is necessary to open a requested file-object to perform the access check each time a file is requested.

The file-open operation consumes a great deal of CPU time. In a server receiving frequent file requests, the need to open every requested file-object to check the access control list is very expensive in terms of CPU time.

There exists a need for an access check system that is more efficient in its use of CPU time. Specifically, there exists a need for an access check system that performs the necessary access check, even at the file-level of access control, without the relatively slow operation of opening the requested file-object to check the associated access control list.

STATEMENT OF THE SOLUTION

The above described problems and others are solved and an advance in the art is achieved by the access check system of the present invention. The methods of the present invention provide an access-permission caching system for storing the last most recently generated access-permissions. If a request arrives at the server that is similar, in terms of the requesting user and the requested resource, to a previously processed request, then the system of the present invention locates the previously generated access-permission in the access-cache. The requesting user's access-permission is therefore determined without opening the requested resource to read the associated access control list. This capability is a significant savings of processing

requested resource, the system combines the name of the requested resource with the user-token of the requesting user into an access-permission and stores the access-permission in the access-cache. When this resource is specified in subsequent requests by the same user, the system will locate the relevant matching access-permission in the access-cache and return the matching access-permission to the server thereby indicating a positive result for the access check. The server then makes available to the user the requested resource.

When a user-token is removed from the user-token cache, the access-cache is scanned for all access-permissions containing the subject user-token and all occurrences are removed from the access cache. When a resource is changed, all access-permissions in the access-cache associated with the subject resource are removed from the access-cache.

An area of significant advantage for the present invention is handling file requests from anonymous users.

In an internet server application, for example, the vast majority of file-object requests are from anonymous users. According to the present invention, all anonymous users share the same user-token and as a result the number of full, file-open access checks performed is dramatically reduced. The system of the present invention can also be configured to utilize filters to group together users having similar access privileges thereby reducing the number of file-open access checks. Operation of the system of the present invention reduces the frequency of the file-open operation thereby reducing the CPU time necessary to perform access checks. The operating system is therefore able to run more efficiently and quickly.

Brief Description of the Drawings

FIG. 1 illustrates a network-computing environment in block diagram form.

FIG. 2 depicts a user-token cache memory location according to the present invention.

FIG. 3 depicts a file-object and associated access control list.

FIG. 4 depicts an access-control list according to the present invention.

FIG. 5-6 illustrate access checking according to the present invention in flow diagram form.

DETAILED DESCRIPTION

General Network Computing Environment - Fig. 1

Fig. 1 illustrates a block diagram of server 100 connected over local bus 101 to network 102. Network 102 may be a local-area network or any other network where multiple users are able to access resources on a single server, such as the internet. Connected to network 102 are clients 1-N. Client N represents any number of additional clients connected to the network. Server 100 communicates with other servers (not shown) and clients 1-N using a standard communications protocol.

Programmed instructions for the access check system of the present invention are executable on processor 103. Processor 103 stores and/or retrieves the programmed instructions and/or data from memory devices that include, but are not limited to, Random Access Memory (RAM) 104 and Read Only Memory (ROM) 105 by way of memory bus 106. Another accessible memory device includes non-volatile memory device 107 by way of local bus 101. Programmed instructions for implementing the access check

system of the present invention are stored on non-volatile memory device 107 as part of system application 108. Also stored on non-volatile memory 107 is file storage volume 109 containing various files as discussed below. The access check system of the present invention is operable in any of several standard computing operating systems readily available in the industry.

Assignment of User-Tokens - FIG. 2

A multiplicity of users (not shown) may connect to server 100 through each of clients 1-N. The process by which a user connects to server 100 is called "logging on". When a user logs on to server 100, the user supplies a user-name and a password to server 100. If the user-name and password supplied by the user are recognized by server 100 then the user is allowed to log on, or connect, to server 100. In a system where access-permission is required for a user to access resources on a server, such as is the subject of the present invention, logging on to the server only allows a user to then request access to a resource on the server. Checking whether a user has access-permission to a particular resource, and providing access to the resource, is the subject of the remaining discussion.

If a user logs on to server 100 for the first time, the system of the present invention assigns a unique user-token to the user and stores the user-token in user-token cache 200. User-token cache 200, stored on RAM 104 of server 100 or on another suitable storage device, is comprised of entries 201-203. There is an entry 201-203 for each user that has logged on to server 100. Each entry 201-203 in user-token cache 200 is comprised of a user-name 204, a user-token 205 and a user-password 206.

For example, when User 1 first logs on to server 100, server 100 assigns a unique user-token, Token1, to User 1 and stores User 1's user-name, user-password, and user-token as entry 201 in user-token cache 200. When User 1 subsequently logs on to server 100, the system of the present invention retrieves User 1's user-token from user-token cache 200 so that User 1 will be assigned the same user-token each time User 1 logs on to server 100.

In a network such as the internet, a large portion of the users logging on to server 100 do so as an 'anonymous' user. Administrators and certain other users may have unique user names and passwords but the bulk of the users logging on are doing so to access resources made available to anonymous users on server 100. If no user-name and password is supplied by a user, server 100 assigns the user-name "Anonymous" to the user. As a result, each anonymous user, one not supplying a user-name and password upon logging on, is assigned the same user-token by the system of the present invention. In the example of FIG 2, and the following figures, anonymous users are assigned user-token Token3. Entry 203 is the entry for user Anonymous in user-token cache 200.

User-tokens 205 are represented in textual form to simplify the description of the present invention. In a preferred embodiment of the present invention, each user-token is a unique 32 bit value assigned by the system of the present invention.

Access-Control Lists - FIG. 3

In a preferred embodiment of the present invention the control of access to server 100's resources is at the file level. This means that each file-object stored on server 100 has associated with it a definition, called an

Access Control List (ACL), of which users have what access rights with respect to the particular file-object.

Non-volatile memory 107 contains file-storage volume 109. File-storage volume 109 contains a number of file-objects 300-302 of which file-object 300 of FIG. 3 is exemplary. File-objects 301-302, discussed with respect to FIG. 4 along with file-object 300, are not shown in the figures but are of the same format as described below with respect to file-object 300.

File-object 300 is comprised of ACL 301 and file 302. File 302 is the actual, substantive content of file-object 300. ACL 301 defines the extent to which various users can access and manipulate file 302. ACL 301 of file-object 300 contains Access Control Entries (ACE) 305-307. Each ACE 305-307 is comprised of a user-token field 303 and a permitted-access field 304. ACE 305 defines the permitted access to file 302 by the user having user-token token1. The permitted access 304 for Token1 is "Full Control" meaning user 1 can manipulate file 302 in any way possible through the operation of server 100. Likewise, the user to which Token2 is assigned as a user-token has "read/write" permission for file-object 300. Users logged in as Anonymous and assigned Token3 as a user-token are permitted only read access according to ACE 307 of access control list 301. Although only three ACE's are depicted in access control list 301 of FIG. 3, those skilled in the art will recognize that any number of ACE's could be added to access control list 301 as necessary for the needs of server 100.

Although the example of file-object 300 depicts access control at the file level of server 100, those skilled in the art will readily recognize that the

methods of the present invention readily apply to systems having different levels of access control. For example, in server 100 an access control list could be associated with non-volatile memory 107 so that access to all resources on non-volatile memory 107 would be defined by a single access control list. Another example would be an access control list associated with file-storage volume 109 whereby access to all the files stored in file-storage volume 109 would be defined by a single access control list. It is also within the scope of the present invention to utilize access control list's at different levels within the same server 100 so, for example, there could be an access control list associated with non-volatile memory 107 and separate access control list's associated with some or all of the file-objects stored on non-volatile memory 107.

Access-Cache - FIG. 4

Access-cache 400 of FIG. 4 is comprised of access-permissions 403-407 each of which is comprised of a file-name field 401 and a user-token field 402. Each access-permission 403-407 indicates that a user, identified by the user-token in user-token field 402, has permission to access, and has accessed, the file identified in the corresponding file-name field 401. Each time server 100 performs an access check for a user-token/file name combination not already existing as an access-permission in access-cache 400 for which access is permitted, server 100 enters a new access-permission in access cache 400.

In a further embodiment of the present invention, access-cache 400 only contains an access-permission for the most recent instance of a file having been accessed.

For example, FIG. 4 indicates two access permissions 403 and 405 for file name 300. If access-permission 403 is

neither access-permission 403 or 405 have a user-token field 402 that matches User 2's user-token. This means that User 2 has not previously read file 300 and the system must perform a full, file open, access check. Referring to FIG. 3, file-object 300 is opened and access control list 301 is read to determine the access-permission granted to User 2. ACE 306 defines User 2's granted access to file-object 300. Permitted-access field 304 of ACE 306 indicates that User 2 has read/write permission for file 300. Access for reading file-object 300 is therefore provided to User 2. Once the file-open access check is completed, an appropriate access-permission (not shown) is added to access-cache 400 so that a file-open access check will not need to be performed the next time User 2 requests file-object 300.

In the above examples of an embodiment of the present invention, access-permissions are only generated and utilized with respect to Read access requests. In a further embodiment of the present invention, access-cache 400 also includes information about the level of access associated with a previous resource request. In this embodiment, if a user having a certain user-token has previously read a certain file but is currently asking to write the file, a new access-permission reflecting the write permission is generated, if appropriate, and added to the access-cache.

Access Check System: Security Maintenance - FIG. 2-4

When changes are made to a file-object, the methods of the present invention operate to ensure that access-cache 400 is updated so that unintended security holes are avoided. Likewise, if user-token cache 200 is modified, the methods of the present invention operate to ensure that access-cache 400 is updated appropriately.

When a file-object is modified, the system of the present invention flushes all access-permissions in access-cache 400 containing the file name of the modified file-object. This means that on the next request for the file-object, the system will be required to perform a full access check by opening the requested file-object to read the associated access control list thereby ensuring that any changes made to the access control list are not over-looked. Maintaining the security of the system in such a way is necessary or access-cache 400 could effectively circumvent any changes made to the access control lists.

In a further embodiment of the present invention, access-cache 400 is flushed of all occurrences of the file name of the modified file-object only when it is the access control list of the file-object that has been modified. Otherwise, if changes have been made to the file-object that do not effect the access control list then the corresponding entries in access-cache 400 are left untouched.

If a user's access to the resources of server 100 is modified or eliminated, then the corresponding entry in the user-token cache is removed. When a user-token is removed from user-token cache 200, the system of the present invention flushes all access-permissions in access-cache 400 containing the removed user-token. This eliminates the possibility of access-cache 400 allowing access to resources even after a user's access to server 100 has been modified or eliminated.

Access Check System: Efficiency Optimization - FIGs. 2-4

An advantage of the present invention for access checks is the elimination of the need to open access control lists each time a resource request is processed

if a similar request has already been processed. A way to maximize this advantage is to group or cluster users to reduce the number of different user-tokens. For example, a number of users within the same work-group might all be granted the same level of access to the files on server 100. A filter can be applied by the system of the present invention so that when a member of the group logs on to server 100, they are assigned the user-token designated for that group rather than a user-token unique to the individual user. In this fashion, fewer user-tokens are generated and therefore fewer access checks requiring the reading of access control lists are performed.

A variation of this advantage is to operate the system of the present invention so that a group or class of users log on to server 100 using the same user-name and password and as a result are assigned the same user-token upon logging on. For example, user-name "Anonymous" is assigned to user's placing requests over the internet for resources on server 100. All such users are assigned the same user-token, Token3 in the example of FIGs. 2-4, and the number of access checks performed by server 100 is significantly reduced. Another example is a server that maps each user that logs on to one of several different user names. Each user name to which a logged-on user is mapped might correspond to a work-group, a level of security access, or any other grouping deemed appropriate by the system administrator.

Access Check System: Detailed Operation - FIG. 5

The flow-charts of FIGs. 5-6 depict the operation of the methods of the present invention in greater detail. FIG. 5 depicts the operation of the access-cache system

while FIG. 6 depicts the operational steps of the security maintenance features of the present invention.

Step 500 represents the process of a user logging on to server 100. As described above with respect to FIG. 2, a user optionally supplies a user-name and a password and is allowed to log on to server 100 if server 100 recognizes the user-name and password. Once a user has logged on, processing continues to decision block 502.

Decision block 502 operates to determine if the user-name of the user exists in an entry in user-token cache 200. If the relevant user-name exists in user-token cache 200 then processing continues to step 504, otherwise processing continues to step 508. Step 504 operates to retrieve from user-token cache 200 the user-token associated with the relevant user-name. All file requests by the user are then identified by server 100 with the user-token retrieved from user-token cache 200.

Step 508 operates to generate a unique user-token for the user if, in decision block 502, it was determined that a user-token had not yet been assigned to the user.

Then, in step 510, the generated user-token is appended to user-token cache 200 so that the next time the user logs on to server 100, the assigned user-token will be available in user-token cache 200. After both step 504 and step 510 processing continues with decision block 506.

Decision block 506 operates to determine if access-cache 400 contains an access-permission that matches the request made by the user. As noted above, a matching access-permission is one that contains the relevant user-token and the requested file-name. If a matching access-permission is identified in access-cache 400 then

processing continues to step 512 otherwise processing continues to step 516.

Step 512 operates to retrieve the matching access-permission from access-cache 400. Server 100 then, in step 514, provides access to the requested file as requested by the user. In step 516, since a matching access-permission was not found in access-cache 400, a full access check is begun by opening the requested file-object and reading the associated access control list. Processing then continues to decision block 518.

Decision block 518 operates to determine if the access control list of the requested file-object permits the access requested by the user. If the user is permitted the requested access according to the access control list then processing continues with step 520 otherwise processing continues to step 522. During step 520, a new access-permission is generated for the current user and requested file and the new access-permission is appended to the contents of access-cache 400. Processing then continues to step 514 where the user is provided access to the requested file.

If, in decision block 18, it is determined that the user does not have the requested access-permission, then processing continues to step 522. In step 522 an error message is generated and communicated to the user to notify the user of the negative result of the access check. After a file request has been processed, either concluding with providing the requested access as in step 514 or by notifying the user of the user's lack of access as in step 522, processing continues to step 524.

Decision block 524 operates to determine if there are additional file requests by the user that have not been processed. For example, in the case of server 100

operating as an internet server, it often receives multiple file requests at once from a single user. Each of these file requests is processed in the same fashion as described above. If the operation of decision block 524 determines that there are further file requests by the same user to be processed then processing returns to decision block 506 otherwise processing continues to step 526 where processing of the user's file requests is concluded.

Access Check System: Detailed Operation - FIG. 6

The processing steps 600-606 depicted in FIG. 6 are repeated on a regular, periodic basis to ensure the security of the resources of server 100. Decision block 600 operates to determine if a file-object has been modified. If a file-object has been modified, processing continues to step 602 otherwise processing continues to step 604.

In step 602, access-cache 400 is flushed of all access-permissions containing the file-name of the modified file. This operation ensures that any changes to a file's access control list will not be over-looked as a result of the operation of the access check system of the present invention. Processing then continues to decision block 604.

Decision block 604 operates to determine if a user-token has been deleted from the user-token cache. If a user's level of access to server 100 is modified or eliminated, the user-token associated with the user is removed from the user-token cache by the operation of server 100. This occurrence is identified by the operation of decision block 604 and processing accordingly proceeds to step 606. In step 606, access-cache 400 is flushed of all access-permissions containing

the deleted user-token. Processing then continues to decision block 600 where the security steps of 600-606 are again initiated.

Steps 600-606 ensure that the speed and efficiency advantages of the access check system of the present invention do not result in security holes. The increased speed of the present invention is thereby implemented only when, from a security standpoint, it is safe to do so.

Summary

The access check system of the present invention includes a method and apparatus for efficiently accomplishing access checks for requested resources rather than performing a full, file-open, access check each time a user requests a resource. Although specific embodiments are disclosed herein, it is expected that persons skilled in the art can and will design alternative header generation systems that are within the scope of the following claims either literally or under the Doctrine of Equivalents.

We claim:

1. A computer-readable medium having computer-executable instructions for providing access to a computer network by performing steps comprising:

receiving a request from a user to access a resource on the computer network;

checking a first memory to determine if the user may access the resource;

providing the user with access to the resource if the first memory indicates that the user may access the resource;

8. The computer-readable medium of claim 1 wherein the resource is a volume of files.

9. The computer-readable medium of claim 1 wherein the resource is a memory device.

10. The computer-readable medium of claim 1 wherein storing the information in the first memory comprises overwriting other information associated with the resource in the first memory.

11. The computer-readable medium of claim 10 wherein storing the information in the first memory comprises writing a token for the user in the first memory over another token for another user that had last previous access to the resource.

12. The computer-readable medium of claim 1 further comprising, if the resource is altered, removing indications from the first memory allowing access to the resource.

13. The computer-readable medium of claim 1 further comprising, if rights of the user are altered, removing indications from the first memory allowing access by the user.

14. The computer-readable medium of claim 1 wherein the request from the user indicates an operation to perform with respect to the resource, and further comprising:

checking the first memory to determine if the user may perform the operation with respect to the resource;

providing the user with access to the resource to perform the operation if the first memory indicates that the user may perform the operation with respect to the resource;

checking a second memory to determine if the user may perform the operation with respect to the resource if the first memory does not indicate that the user may perform the operation with respect to the resource;

providing the user with access to the resource if the second memory indicates that the user may perform the operation with respect to the resource; and

storing information in the first memory indicating that the user may perform the operation with respect to the resource if, after checking the second memory, the second memory indicates that the user may perform the operation with respect to the resource.

15. A method for providing access to a computer network, the method comprising:

receiving a request from a user to access a resource on the computer network;

checking a first memory to determine if the user may access the resource;

providing the user with access to the resource if the first memory indicates that the user may access the resource;

checking a second memory to determine if the user may access the resource if the first memory does not indicate that the user may access the resource;

providing the user with access to the resource if the second memory indicates that the user may access the resource; and

storing information in the first memory indicating that the user may access the resource if, after checking the second memory, the second memory indicates that the user may access the resource.

16. The method of claim 15 wherein the first memory indicates that the user may access the resource by indicating that access to the resource has been previously provided to the user.

17. The method of claim 15 wherein the user is represented in the first memory by a token.

18. The method of claim 17 wherein the token also represents a plurality of other users.

19. The method of claim 17 wherein the token represents anonymous users.

20. The method of claim 17 further comprising:
authorizing the user by checking a password provided by the user;
associating the token with the user after authorizing the user; and
using the token to check the first memory.

21. The method of claim 15 wherein the resource is a file.

22. The method of claim 15 wherein the resource is a volume of files.

23. The method of claim 15 wherein the resource is a memory device.

24. The method of claim 15 wherein storing the information in the first memory comprises overwriting other information associated with the resource in the first memory.

25. The method of claim 24 wherein storing the information in the first memory comprises writing a token for the user in the first memory over another token for another user that had last previous access to the resource.

26. The method of claim 15 further comprising, if the resource is altered, removing indications from the first memory allowing access to the resource.

27. The method of claim 15 further comprising, if rights of the user are altered, removing indications from the first memory allowing access by the user.

28. The method of claim 15 wherein the request from the user indicates an operation to perform with respect to the resource, and further comprising:

checking the first memory to determine if the user may perform the operation with respect to the resource;

providing the user with access to the resource to perform the operation if the first memory indicates that the user may perform the operation with respect to the resource;

checking a second memory to determine if the user may perform the operation with respect to the resource if the first memory does not indicate that the user may perform the operation with respect to the resource;

providing the user with access to the resource if the second memory indicates that the user may perform the operation with respect to the resource; and


storing information in the first memory indicating that the user may perform the operation with respect to the resource if, after checking the second memory, the second memory indicates that the user may perform the operation with respect to the resource.

ABSTRACT

An access-check system for a network server comprises an access-cache for storing access-permissions generated by the server in response to resource access requests. The system retrieves the appropriate access-permission from the access-cache in response to receipt of a request necessitating the same access-permission as already generated for an earlier processed request. A user-token cache is also employed to assign a unique user-token, to be used in the access-cache, to each user logged on to the server. Changes made to the user-token cache are reflected in the access-cache by removing from the access-cache those entries containing the changed user-token. Changes made to an access control list are reflected in the access-cache by removing from the access-cache those entries containing the server resource with which the changed access control list is associated.

SECRET 04049

FIG. 1

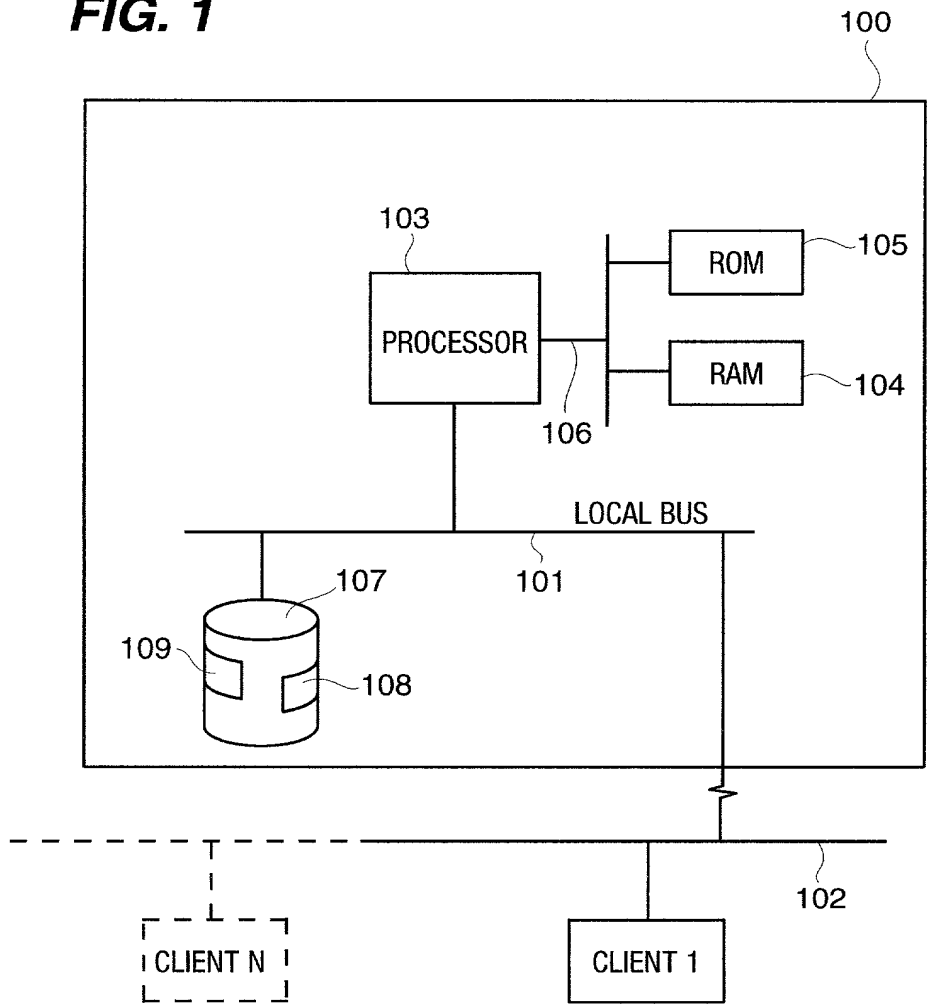

	204	205	206
	USER-NAME	USER-TOKEN	USER-PASSWORD
201	USER 1	TOKEN 1	PASS 1
202	USER 2	TOKEN 2	PASS 2
203	ANONYMOUS	TOKEN 3	

200

FIG. 2

303		304	
USER-TOKEN		PERMITTED-ACCESS	
305	TOKEN 1	FULL CONTROL	
306	TOKEN 2	READ, WRITE	
307	TOKEN 3	READ	
FILE CONTENT			

300

FIG. 3

401		402	
FILE NAME		USER TOKEN	
403	300	TOKEN3	
404	301	TOKEN3	
405	300	TOKEN1	
406	302	TOKEN3	
407	301	TOKEN1	

400

FIG. 4

FIG. 5


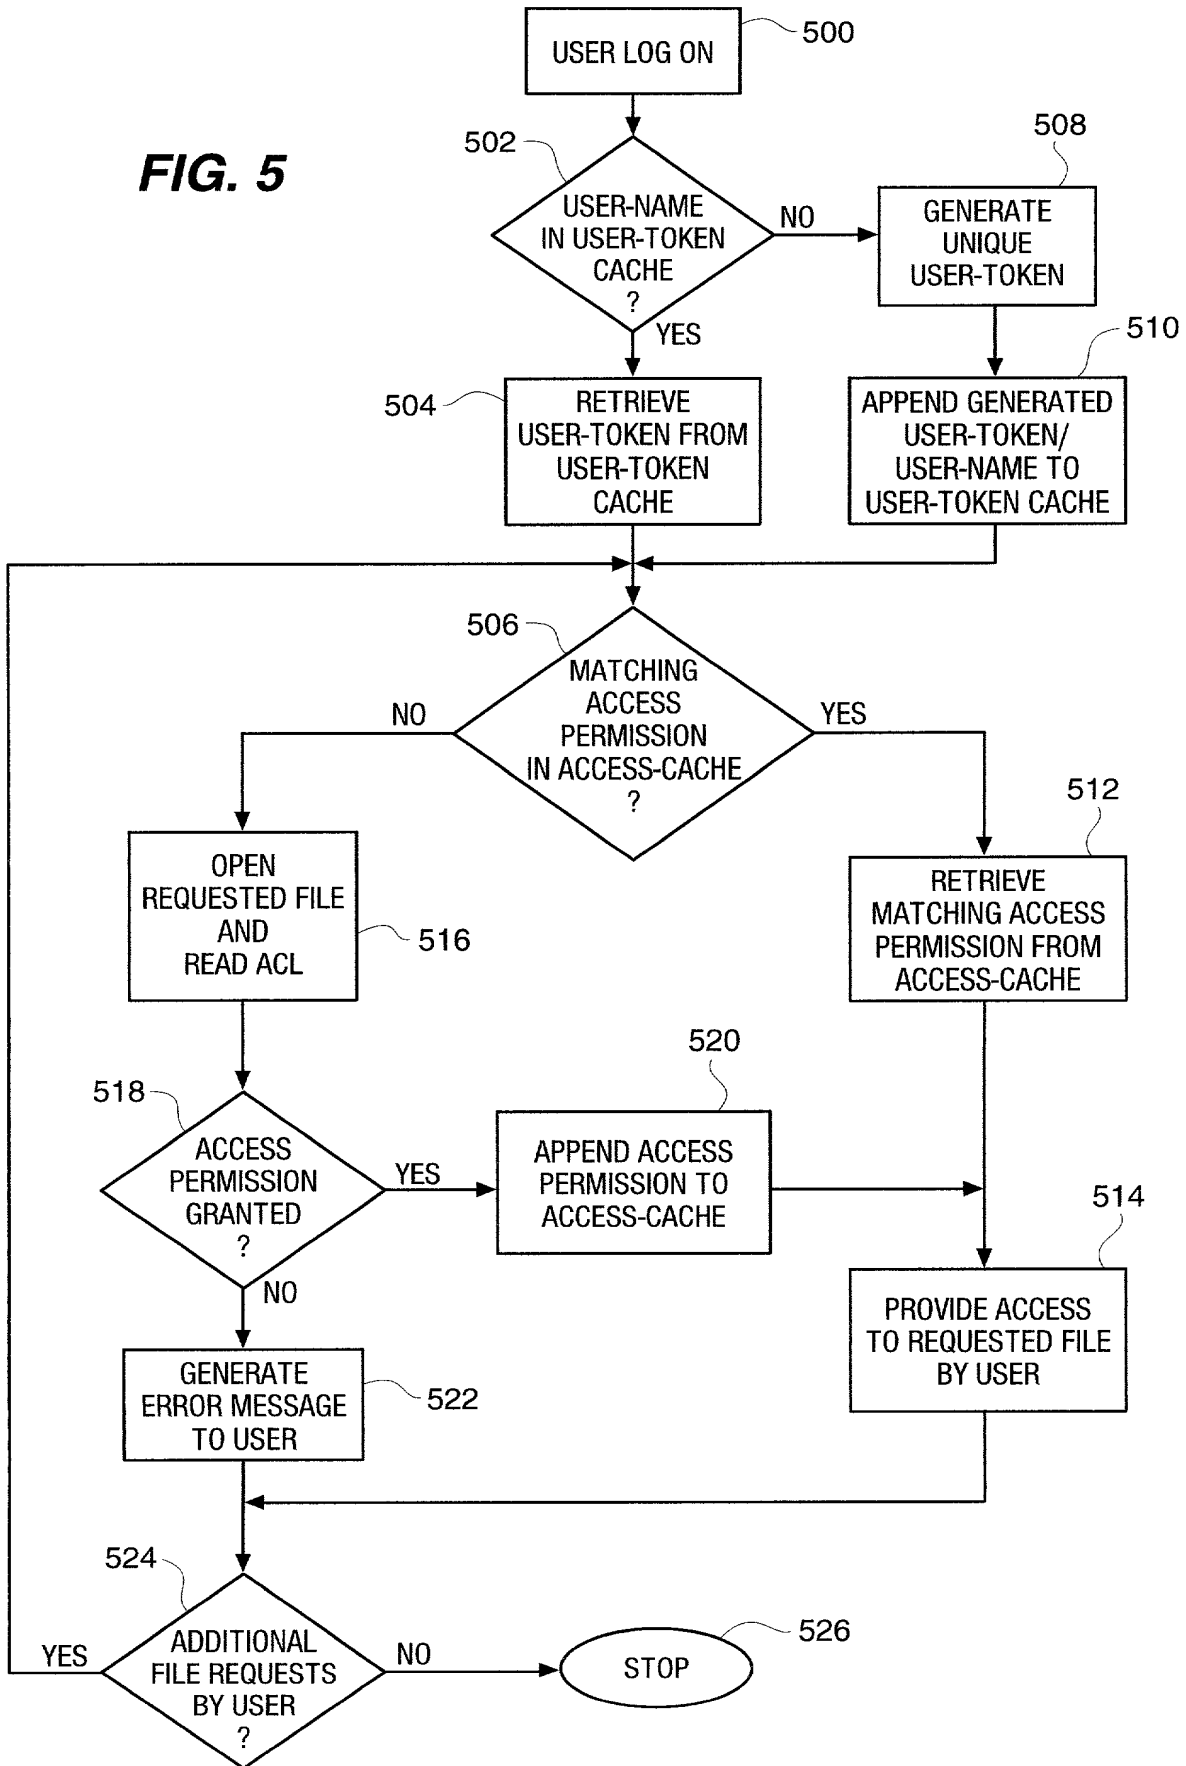


FIG. 6

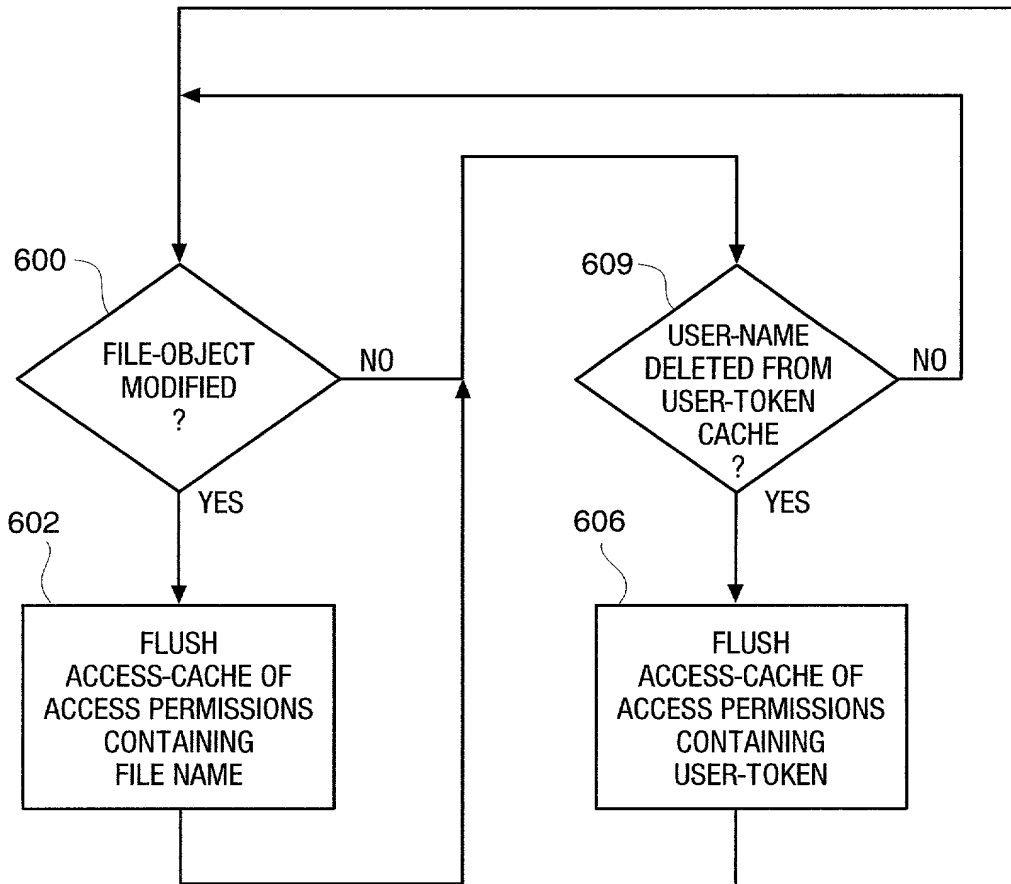

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of:

HUNNICUTT ET AL.

Serial No. Not Assigned
(continuation of 08/689,838)

Group Art Unit: 2757


Examiner: E. RAMIREZ

Filed: January 4, 1999

For: ACCESS CHECK SYSTEM
UTILIZING CACHED ACCESS
PERMISSIONS

CERTIFICATE OF MAILING UNDER RULE 10

I hereby certify that this paper is being deposited with the United States Postal Service
"Express Mail Post Office To Addressee" Service under 37 C.F.R. 1.10 with Express
Mail No. EL150816925US on the date shown and addressed to Assistant
Commissioner for Patents, Box Patent Application, Washington, D.C. 20231,
on January 4, 1999


(signed)

ASSOCIATE POWER OF ATTORNEY

Assistant Commissioner for Patents
Washington, D.C. 20231

Dear Sir:


I hereby appoint: Kirk D. Williams, Reg. 42,229, and Michael J. Setter, Reg. 37,936, both having a post office address of Duft, Graziano & Forest, P.C., 1790 30th Street, Suite 140, Boulder, Colorado 80301-1018, and Katie E. Sako, Reg. 32,628, and Daniel D. Crouse, Reg. 32,022, both having a post office address of Microsoft Corporation, One Microsoft Way, Redmond, Washington 98052-6399, as my associate attorneys in the above-identified application, to prosecute this application, to make alterations and amendments therein, and to transact all business in the Patent and Trademark Office connected therewith.

Please address all future communications concerning this application to:

Michael J. Setter, Reg. 37,936
DUFT, GRAZIANO & FOREST, P.C.,
1790 30th Street, Suite 140
Boulder, Colorado 80301-1018
303-449-9497

Respectfully submitted,

January 4, 1999


James M. Graziano, Reg. 28,300
One of the Attorneys for Applicant(s)
DUFT, GRAZIANO & FOREST, P.C.,
1790 30th Street, Suite 140
Boulder, Colorado 80301-1018
303-449-9497

DECLARATION FOR PATENT APPLICATION

Docket Number: 1001/028:36373

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name. I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled "ACCESS CHECK SYSTEM UTILIZING CACHED ACCESS PERMISSIONS" the specification of which is attached hereto unless the following is checked:

___ was filed on _____ as United States Application Number or PCT International Application Number
_____ and was amended on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed.

Prior Foreign Application(s)

Priority Claimed
___ Yes ___ No

(Number) (Country) (Day/Month/Year Filed)

(Number) (Country) (Day/Month/Year Filed)

___ Yes ___ No

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, §1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

(Application Number)

(Filing Date)

(Status - patented, pending, abandoned)

(Application Number)

(Filing Date)

(Status - patented, pending, abandoned)

I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and to transact all business in the U.S. Patent and Trademark Office connected therewith: Donald M. Duft 17,484; James M. Graziano 28,300; Carl A. Forest 28,494; Mark A. Guetlich 38,900; Dan Cleveland, Jr. 36,106; Martin L. Shively 33,553 and Steven W. Weinrieb 26,520. Address all telephone calls to Martin L. Shively at Telephone No. (303) 449-9497 and address all correspondence to Martin L. Shively, DUFT, GRAZIANO & FOREST, P.C., 1790 - 30th Street, Suite 140, Boulder, Colorado 80301-1018.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of sole or first inventor, if any (given name, family name) Heath Hunnicutt

Inventor's signature Heath Hunnicutt

Date 1 August 1996

Residence Redmond, WA 98052

Citizenship U.S.

Post Office Address 4850 - 156th Avenue NE, Apt. 138, Redmond, WA 98052

Full name of second joint inventor, if any (given name, family name) John F. Ludeman

Inventor's signature John F. Ludeman

Date 8/12/96

Residence Redmond, WA 98053

Citizenship U.S.

Post Office Address 1210 - 230th Avenue NE, Redmond, WA 98053